

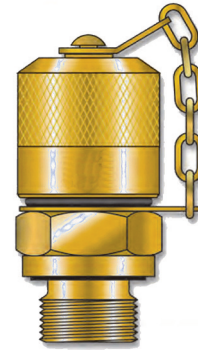


Test Point - 1620 Test Points

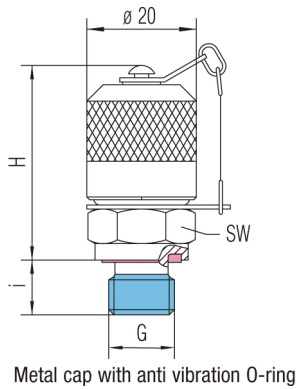

Thread G	Pressure Max PSI (Bar)	H (mm)	I (mm)	SW (mm)	Zinc-plated Steel NBR Seals	Zinc-plated Steel FKM Seals	Stainless Steel FKM Seals
7/16-20 UNF (SAE-4)	9000 (630)	37	9	17	BTP20/O2H1B	BTP20/O21H1F	BTP20/O2H2F
9/16-18 UNF (SAE-6)	9000 (630)	36	10	19	BTP20/O3H1B	BTP20/O3H1F	BTP20/O3H2F
1/8 NPTF	5800 (400)	33	9.5	17	BTP20/T1H1B	BTP20/T1H1F	BTP20/T1H2F
1/4 NPTF	5800 (400)	33	16.5	17	BTP20/T2H1B	BTP20/T2H1F	BTP20/T2H2F
ISO 228 - G1/8	5800 (400)	38	8	17	BTP20/G1H1B	BTP20/G1H1F	BTP20/G1H2F
ISO 228 - G1/4	9000 (630)	36	10	19	BTP20/G2H1B	BTP20/G2H1F	BTP20/G2H2F
ISO 228 - G3/8	9000 (630)	36	10	22	BTP20/G3H1B	BTP20/G3H1F	BTP20/G3H2F
M 10 X 1	9000 (630)	37.5	8.5	17	BTP20/M10H1B	BTP20/M10H1F	BTP20/M10H2F
M 12 X 1.5	9000 (630)	36	10	17	BTP20/M12H1B	BTP20/M12H1F	BTP20/M12H2F
M 14 X 1.5	9000 (630)	36	10	19	BTP20/M14H1B	BTP20/M14H1F	BTP20/M14H2F
M 16 X 1.5	9000 (630)	36	10	22	BTP20/M16H1B	BTP20/M16H1F	BTP20/M16H2F
ISO 7/l - R1/8	5800 (400)	33	13	17	BTP20/R1H1B	BTP20/R1H1F	BTP20/R1H2F
ISO 7/l - R1/4	9000 (630)	33	13	17	BTP20/R2H1B	BTP20/R2H1F	BTP20/R2H2F

Micro Bore Flexible Hoses

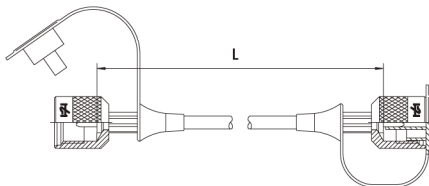

L in inches	L in mm	Steel Fittings	Stainless Steel Fittings
8	200	BTH/2H1-200	BTH/2H2-200
12	300	BTH/2H1-300	BTH/2H2-300
16	400	BTH/2H1-400	BTH/2H2-400
20	500	BTH/2H1-500	BTH/2H2-500
25	630	BTH/2H1-630	BTH/2H2-630
31	800	BTH/2H1-800	BTH/2H2-800
39	1000	BTH/2H1-1000	BTH/2H2-1000
49	1250	BTH/2H1-1250	BTH/2H2-1250
59	1500	BTH/2H1-1500	BTH/2H2-1500
79	2000	BTH/2H1-2000	BTH/2H2-2000
98	2500	BTH/2H1-2500	BTH/2H2-2500
126	3200	BTH/2H1-3200	BTH/2H2-3200
157	4000	BTH/2H1-4000	BTH/2H2-4000
197	5000	BTH/2H1-5000	BTH/2H2-5000

Max Operating Pressure 9000 psi (630 Bar)
 Operating Temperature -20° to 100° C
 -4° to 212° F

Pressure Utilization Factor
 122°F (50°C) 100% 9000 psi
 176°F (80°C) 86% 7740 psi
 212°F (100°C) 77% 6930 psi

- Polyamide Core & Jacket with Polyester Braid
- Custom Hoses Available